




HEPHAESTUS

The peculiar arrangement of its gear train allows covering the middle slide completely, making the HEPHAESTUS forks particularly recommended for “dirty” working environments (such as sand molded casting).

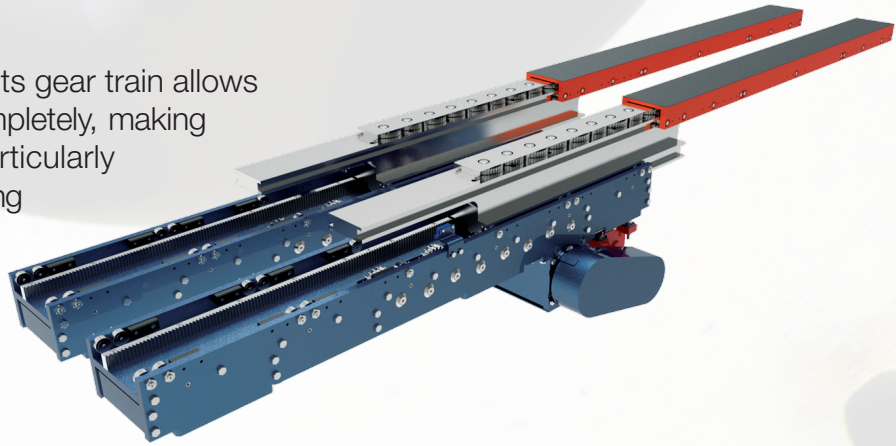

SINGLE DEPTH

DOUBLE DEPTH

TRIPLE DEPTH

PRODUCT CODE	Q LOAD (KG)	L FIXED BODY LENGTH (MM)	LS UPPER SLIDE LENGTH (MM)	S1 STROKE (MM)	MAX BENDING UNDER LOAD (MM)
H-100		1000	1000	1100	20
H-110	800	1100	1100	1200	23
H-120		1200	1200	1300	27
H-130	700	1300	1300	1400	30
H-140	560	1400	1400	1500	32
H-150	400	1500	1500	1600	34

This machine can handle loads up to 800 kg with a very low flexion, despite a thickness of just 55 mm.

COMBINED PRODUCTS

SPECIAL PRODUCTS

